

CAPTIVE RUBBER MOUNT – TYPE CRM 305 & TYPE CRM 505



Many types of mechanical equipment cannot tolerate a high profile mount. CRM Mounts answer that need with a low profile, fail safe design. The all-directional captive rubber elements prevent metal to metal contact under normal use.



CRM mounts configure high quality natural rubber between pressure plates on a robust steel stand-off base. This permits a wide variety of installation methods in compression, tension or shear.

Mechanical equipment mount type CRM is a low profile, acoustic standoff for all types of mechanical equipment requiring isolation from the structure for sound and vibration reasons.

**LOW PROFILE ACOUSTIC
STAND-OFF MOUNTING
FOR MECHANICAL
EQUIPMENT.**



Available in 30 and 50 Durometer:


CRM-305 compression/tensile 200 lbs, shear 120 lbs.
CRM-505 compression/tensile 400 lbs, shear 210 lbs.

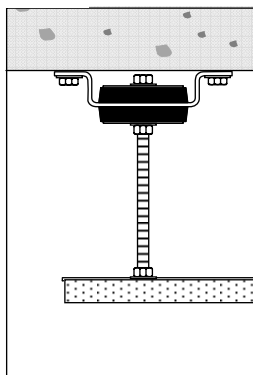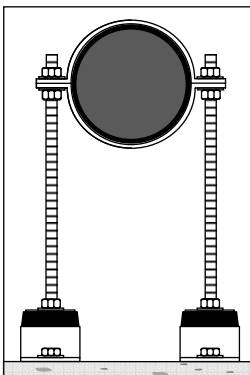

APPLICATIONS:

- Garage doors
- Transformers
- HVAC equipment
- Fans
- Piping
- Pumps
- Garbage chutes

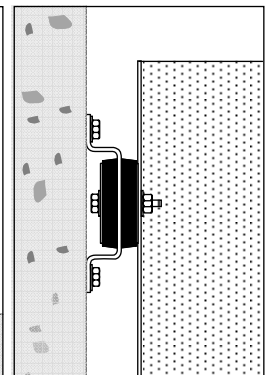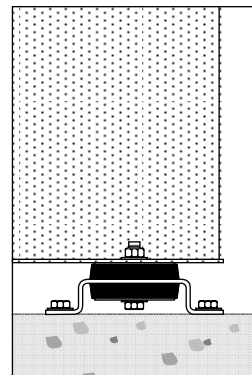

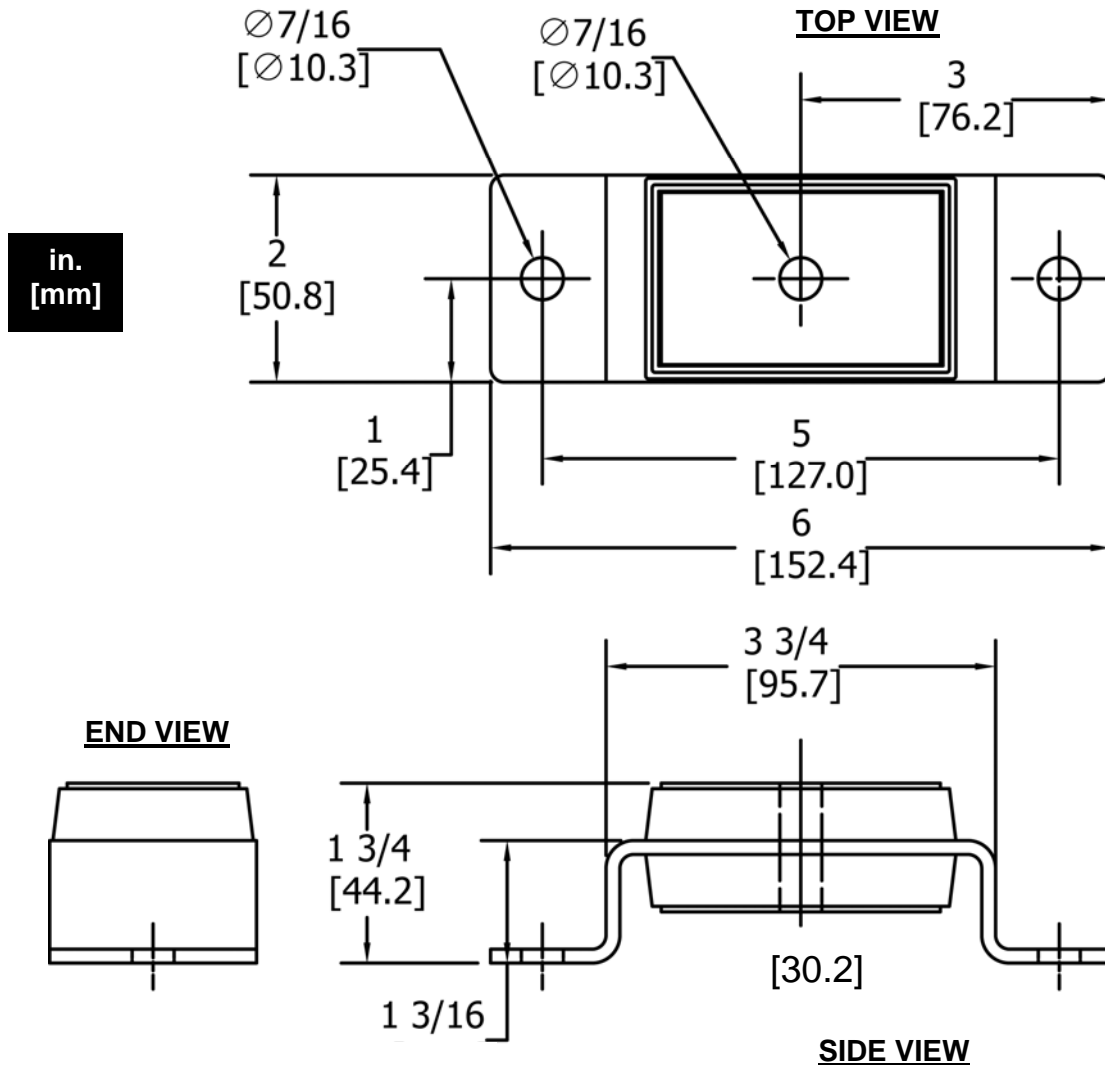

CRM Mounts allow the use of any bolt type fasteners or threaded rod up to 3/8" dia. (10mm) in any length to suit application. The use of nylon insert self locking type nut is recommended.

CRM Mounts have a wide foot print for extremely stable mounting.

Finish - Zinc Dichromate for corrosion control.

Note: Installer must engage threaded fasteners until surface plates meet internal stand-off bushing to put the mount into proper pre-compression.

Manufactured in Canada.

Manufactured By:

WILREP LTD.

1515 Matheson Blvd. East; Unit C-10
 Mississauga, Ontario L4W2P5
 Tel.(905) 625-8944 Fax(905) 625-7142
 Toll Free: 1-888-625-8944
 Email: info@wilrep.com
 Web: www.wilrep.com

Distributed By: