

SOUND CONTROL UNDERLAYMENT

ISO-SEP PM PRIVACY MAT




Providing exceptional acoustic performance in a very low profile pad (4 mm), Iso-Sep PM answers the questions and concerns of multi-family builders by meeting and exceeding code requirements for STC and IIC ratings. This versatile sound control underlayment can be used under gypsum or light weight concrete pours or with select floor finishes applied directly on top saving time and construction costs.

THIN MAT TECHNOLOGY

- Made from Rubber which is still the best isolation material known and will not crush out.
- Profiled bottom surface of the pad reduces the floor contact area by a nominal 80% while providing even support for the gypsum pour, or selected finished floor.
- Breaks the sound transmission path through the floor/ceiling assembly and prevents flanking from room to room.

ENVIRONMENTALLY FRIENDLY AND EASY TO INSTALL

- Iso-Sep PM is manufactured from 100% recycled tire rubber bonded with a permanently elastic polyurethane binder
- Contributes to LEED credits. Low VOC.
- Class 1 Fire Rated with a Class 1 rated surface material.
- Designed for direct 'pour over', the carrying backer sheet is re-inforced fiberglass/cellulose.
- Installs fast - Easy to cut with standard utility knives.
- Iso-Sep PM lays flat and will not slip or buckle during installation.

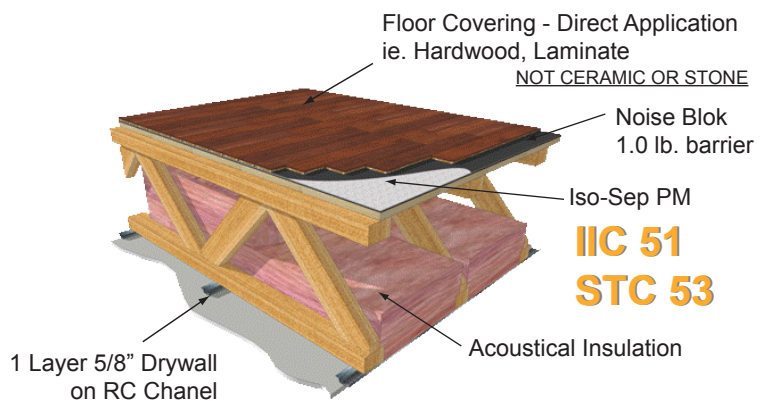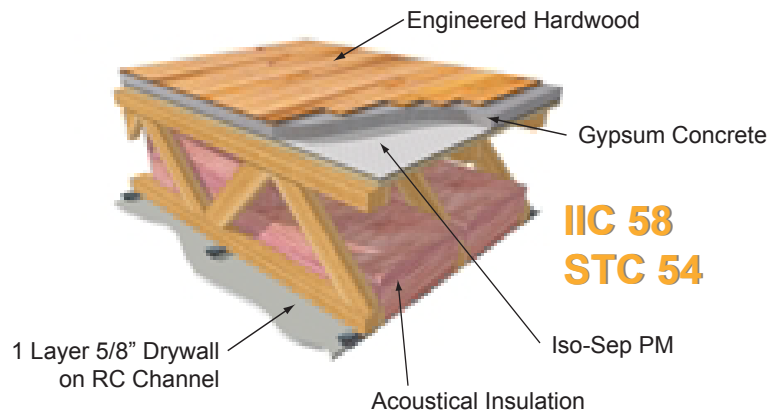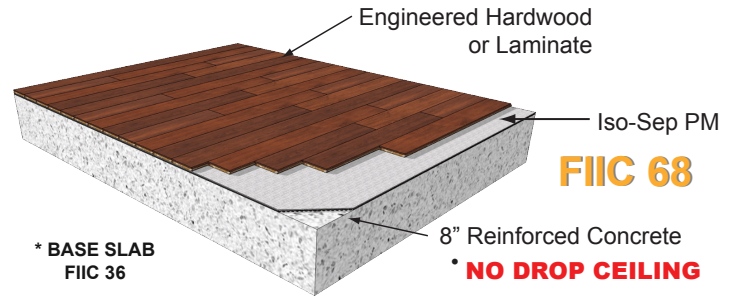

PRODUCT DATA

PRODUCT	ISO-SEP PM
ROLL DIMENSIONS	54" X 60'
THICKNESS	4mm NOM.
WEIGHT / ROLL.	60 LBS.

AcustiGuard-WILREP LTD.

1515 Matheson Blvd. East, Unit C-10 Miss., Ont. L4W 2P5
www.acoustiguard.com - info@wilrep.com

1-888-625-8944