

Noise-Blok 100 - 200

Noise-Blok is a thin, dense, plain noise barrier material available in 1.0 lb. and 2.0 lb. per sq. ft. weights (0.5 lb. also available). This flexible, mineral filled sheeting can be applied alone or in combination with other acoustic products where high transmission loss is required. This material is extremely versatile as it can be glued, formed, die cut or hung.

Noise Barrier Sheeting

Frequency (Hz)	Transmission Loss (dB)	
	NB-100	NB-200
100	15	18
125	13	18
160	16	18
200	15	19
250	22	21
315	17	22
400	19	24
500	20	25
630	21	27
800	22	28
1000	24	30
1250	26	32
1600	28	34
2000	29	36
2500	31	37
3150	34	40
4000	35	42
5000	36	43
6300	36	44
STC	27	33

APPLICATIONS AND PRODUCT DATA

USES

•Walls •Floors •Ceilings •Acoustic Wraps
 Noise-Blok is easy to apply and can be cut with common utility knives. For secure and permanent installations use specified adhesive – available from Wilrep Ltd.

THICKNESS

NB-100: .05" thick, NB-200: .1"


STANDARD DIMENSIONS

Sheets: 48" wide X 72" length
Rolls: 48" wide X 25' or Custom Roll Sizes Available Upon Request.
 CUSTOM TRIMMING AND DIE CUTTING CAN BE PROVIDED

TYPICAL PHYSICAL PROPERTIES

Specific Gravity: 2.1
Colour: Black
Flammability: MVSS 302 – Passes, SAE J 369 passes 2.6" per minute
Weight: NB-100: 1.0 lb./sq.ft. NB-200: 2.0 lb./sq.ft.
 (Also available NB-50: 0.5 lb./sq.ft.)
 Tensile psi, ASTM D 412, Die A, 250
 Elongation % ASTM 412, Die A, 450

PERFORMANCE DATA

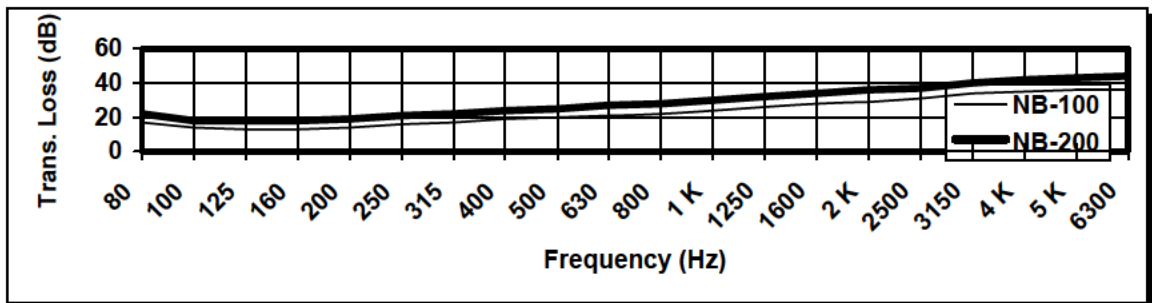

NOTICE Stated performance data is based on recognized testing methods. Product performance can be affected by field conditions and installation methods. Users of these products are responsible for determining suitability for their application and compliance with any legal provisions including those relating to health and safety.

WILREP LTD.
 1515 Matheson Blvd. E., Unit C-10, Mississauga, Ontario, Canada L4W 2P5
Tel. (905)625-8944 Fax (905)625-7142
 e-mail: info@wilrep.com