

Liquid Roc 300 Grout Pouch



Yield:
10 cu. in. / pouch

Liquid Roc 300 Grout Pouches are safe and simple to use. No field proportioning, no errors, which means no waste.

ADVANTAGES

- No dispensing tools needed
- Pre-measured adhesive
- No messy mixing
- Will cure below freezing
- Pourable consistency

CONCERNS

- Cannot be used in horizontal or overhead holes
- Must be used within 20 minutes after mixing
- 12 Month shelf life


APPROVALS / LISTINGS

- ICBO # 4320
- City of Los Angeles #RR25020
- State D.O.T's as follows: AR, FL, GA, IL, IA, KY, MI, MS, MO, NY, NC, OH, OR, PA, SC, TN, VA

NOTICE: Stated data is based on recognized testing methods. Product performance can be affected by field conditions and installation methods. Users of these products are responsible for determining suitability for their application and compliance with any legal provisions including those relating to health and safety.

INSTALLATION

1. Drill hole to correct size & depth using a rotary-hammer.
2. Remove dust and rubble from the hole with compressed air, a brush and water. Hold each end of our grout pouch and pull firmly to remove divider. Mix thoroughly in pouch until color is uniform. Do not use excessive pressure or puncture pouch while mixing.
3. Cut corner and fill hole 2/3 full.
4. Insert stud turning slowly by hand.
5. Leave it undistributed through prescribed curing time consistent with the on-site temperature.

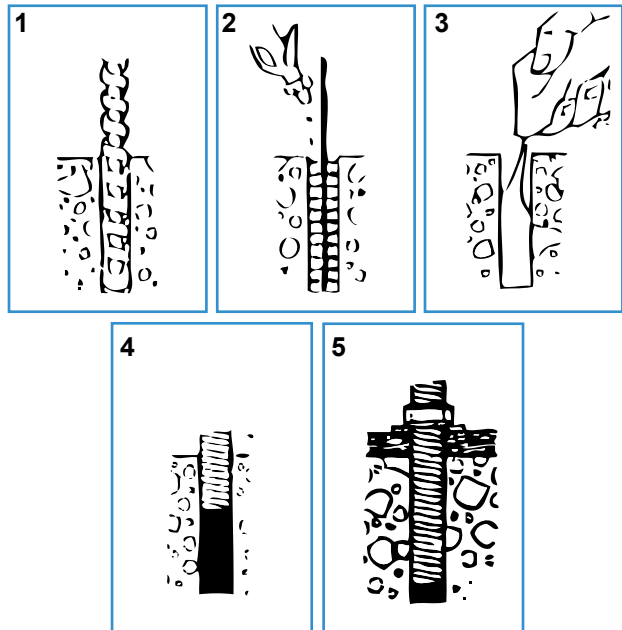

CURE TIME

Concrete Temperature	Time
Over 80°F	10 - 15 Min.
80°F to 68°F	15 - 20 Min.
68°F to 58°F	20 - 30 Min.
58°F to 48°F	30 - 60 Min.
48°F to 38°F	2 hours
38°F to 28°F	4 hours
28°F to 18°F	6 hours
BELOW	24 hours